

VOLT® Top Dog Downlight Features:

- Solid cast brass construction
- Uses MR16 LED Bulbs or Halogen Bulbs
- 25' lead wire so you do not need to make a visible splice up on the tree.
- Extra long adjustable glare guard perfect for preventing unwanted glare in downlighting.
- The knuckle has been sealed with silicon so water cannot enter the fixture even when it is mounted upside down
- The Top Dog Downlight INCLUDES a solid brass surface mount (Pictured)
- Low voltage 12 volts
- VOLT's® Lifetime Warranty




VOLT® The Tank Features:

- Solid cast brass construction
- Pre-aged brass finish. There is no powder coating, paint or finish to wear off or peel—just the natural patina beauty of brass that does not corrode.
- Solid brass or stainless steel components.
- The body is machine threaded and screws tight onto an o-ring for the ultimate moisture tight design.
- Choose from 48" standard or 25' hub ready 16G, SPT-2 premium tinned copper lead wire.
- The lens is convex so water does not puddle on the lens which reduces hard water build-up and water intrusion.
- Beryllium copper socket – more corrosion resistant than copper.
- Socket and machine thread body are pre-greased for smooth operation and moisture protection.
- Silicon plug where lead wires exit fixture. Prevents ground moisture and insects from entering fixture through the stem.
- Clear lens for increased photometric results.
- Low voltage, 12V AC fixture
- VOLT's® Lifetime Warranty



VOLT® Big Splash Flood Light & Wall Wash Features:

- Solid cast brass construction --- 4lbs of solid brass!
- Large Flood Light or Wall wash.
- Comes with 3 lens (frosted, linear spread, clear)
- Includes Hammer® Stake
- Choose 48" standard OR 25' hub ready 16 AWG Tinned Copper Wiring
- Brass surface mount base shown in picture is an optional accessory and is NOT INCLUDED
- Low voltage 12 volts
- VOLT's® Lifetime Warranty

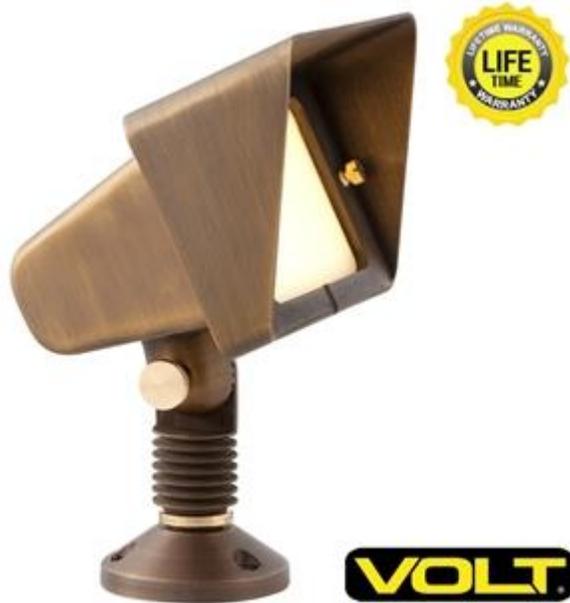

VOLT® Big Par 36 Flood Light Features:

- Solid cast brass construction
- Beautiful bronze finish
- Rated to 50W (PAR36 lamp not included)
- Choose from 48" standard OR 25' hub ready 16G, SPT-2 tinned coated copper lead wire.
- Completely sealed glass lens protects wiring.
- Ground Hammer Stake included.
- Brass surface mount base shown in picture is an optional accessory and is NOT INCLUDED
- Low voltage 12 volts
- VOLT's® Lifetime Warranty



VOLT® Max Spread Path & Area Light Features:

- Solid cast brass construction
- Pre-aged brass finish. There is no powder coating, paint or finish to wear off or peel—just the natural patina beauty of brass that does not corrode.
- Also available in a raw copper finish. See VOLT® Max Spread Copper Area Light.
- Solid brass or stainless steel components.
- Ceramic white paint under shade for maximum photometrics
- Choose from 48" standard or 25' hub ready 16G, SPT-2 premium tinned copper lead wire.
- The body is machine threaded and screws tight onto an o-ring for the ultimate moisture tight design.
- Adjustable shade moves up and down to change illumination results
- Beryllium copper socket – more corrosion resistant than copper.
- Silicon plug where lead wires exit fixture. Prevents ground moisture and insects from entering fixture through the stem.
- Add 6", 12", or 24" extension rods to raise overall height and increase the illumination diameter.
- Low voltage 12 volt fixture.
- VOLT's® Lifetime Warranty



VOLT® Conehead Path & Area Light Features:

- Solid cast brass construction
- Pre-aged brass finish. There is no powder coating, paint or finish to wear off or peel—just the natural patina beauty of brass that does not corrode.
- Also available in a raw copper finish. See VOLT's® Conehead Area Light Copper Finish.
- Solid brass or stainless steel components.
- 1" thick unbendable stem.
- Choose from 48" standard or 25' hub ready 16G, SPT-2 premium tinned copper lead wire.
- Ceramic white paint under shade for maximum photometrics
- Adjustable shade moves up and down to change illumination results
- Beryllium copper socket – more corrosion resistant than copper.
- Silicon plug where lead wires exit fixture. Prevents ground moisture and insects from entering fixture through the stem.
- Add 6", 12", or 24" extension rods to raise overall height and increase the illumination diameter.
- VOLT's® Lifetime Warranty



"The Brass Bunker" Louvered Step Light Features:

- Solid cast brass construction
- Canister is solid cast brass----99% of other manufacturers use folded sheet metal box (not water tight)
- Choose 48" standard or 25' 16G, SPT-2 premium tinned copper lead wire.
- Water tight---pressure rubber gasket, rubber seal around wire exit.
- Beryllium pre-dielectric greased socket.
- Silicon plug where lead wires exit fixture. Prevents ground moisture and insects from entering fixture.
- Lens flush with fixture so water cannot puddle.
- Frosted lens for smoother photometric results.
- Low voltage, 12V AC fixture
- VOLT's® Lifetime Warranty



VOLT.

VOLT® Deck Light Solid Brass Features:

- Solid cast brass construction
- Pre-aged bronze finish. There is no powder coating, paint or finish to wear off or peel—just the natural patina beauty of raw copper that does not corrode.
- Solid brass or stainless steel components.
- Made to fit where other deck lights may not
- Choose between 48" standard lead wire and 25' hub ready lead wire. Wire grade 16G, SPT-2 premium tinned copper lead wire.
- Ceramic white interior reflects light to maximize output and beam spread.
- Beryllium copper socket – more corrosion resistant than copper.
- Silicon plug where lead wires exit fixture. Prevents ground moisture and insects from entering fixture through the stem.
- Low voltage, 12 volts
- VOLT's® Lifetime Warranty



VOLT® Ultra Premium Up/Down Sconce Features:

- Solid cast brass construction
- Natural bronze brass finish
- Choose 48" standard or 25' 16G, SPT-2 premium tinned copper lead wire.
- Uses (2) MR16 lamps (Not Included).
- Beryllium pre-dielectric greased sockets.
- Silicon plug where lead wires exit fixture. Prevents ground moisture and insects from entering fixture.
- Lens flush with fixture so water cannot puddle.
- Water tight---pressure rubber gasket, rubber seal around wire exit.
- Low voltage, 12V AC Fixture
- VOLT's® Lifetime Warranty



VOLT® LED Underwater Light FORGED BRASS Features:

- Solid forged brass construction
- Natural bronze finish - No heavy corrosion (like aluminum fixtures) in chlorinated or chemically treated water.
- Uses the latest VOLT® LED MR16 technology
- 25' 16G, SPT-2 premium tinned copper lead wire
- Beryllium pre-dielectric greased sockets.
- Water tight seals --- pressure rubber gasket, rubber seal around wire exit. (fully submersible)
- Clear glass for maximum light output
- Silicon plug where lead wire exits fixture
- Perfect for placing in water fountains, water falls, ponds, pools, etc.
- Low voltage, LED 10-15v AC Fixture
- VOLT's® Lifetime Warranty



VOLT® Pro 12-22v Multi-Tap Transformer Features:

- Stainless steel case
- Premium components, windings, primary and secondary circuits.
- Professional grade low voltage outdoor lighting transformer. Stainless steel cabinet. Weather proof door enclosure, stainless steel mounting bracket, separate circuit breaker toggle switches for each 300w zone.
- Low voltage transformer designed specifically for outdoor lighting and landscape lighting professionals.
- Multi-Tap Transformer (12 volt all the way to 22 volts). Enables you to compensate for voltage drop -- even on extra long runs of over 250'!
- Ensures lights are all bright and even for professional results.
- Timer and photocell ready ports (timer and photocell not included).
- Toroid core--runs cooler, quieter, more efficient, lasts longer.
- Only draws as much electricity as needed to illuminate the bulbs you have -- e.g. a 1200w transformer will only draw 400w of power if you only have 400 watts of bulbs hooked to it. The 1200w refers to the maximum wattage you can hook up to it.
- Built-in stainless steel mounting bracket.
- Includes a 5 1/2ft line voltage power supply cord. Not designed to be hardwired or for use with an extension cord, doing so will void any warranties.
- Multi-tap voltage output from 12 to 22 volts. Input Voltage 120V A/C
- Output Voltage from 12-22V A/C. Max output amps per circuit: 25 Amps
- Huge tap connection ports -- each individual tap can hold up to 6 home runs! That's 6 home runs per 300w circuit
- E.g. 6 runs on a 300w, 12 runs on a 600w, 18 runs on a 900w, 24 runs on a 1200w transformer!
- Toroid core transformers are the best type of low voltage transformer you can buy. They are more efficient, reliable and last longer than the laminated magnetic transformers found on other brands
- 10 YEAR WARRANTY. UL LISTED.



VOLT

3 LED with Bracket

Technical Information

Width:	3"
Height:	0.75"
Length:	7"
Lamp Included:	Integrated
Weight:	0.55LBS
Voltage:	12 VAC/VDC
Safety Rated:	Wet
Dual Mount:	No
Color Temperature Range:	2420-2700
Expected Life Span:	40000 Hours
Light Source:	LED
Kelvin Temperature:	2560
Number of Bulbs:	3
Max Watt:	0.81
Operating Voltage Range:	9-15 VAC/VDC
Finish:	Textured Architectural Bronze



1 LED with Bracket

Technical Information

Width:	3"
Height:	0.75"
Length:	3"
Lamp Included:	Integrated
Weight:	0.3LBS
Voltage:	12 VAC/VDC
Safety Rated:	Wet
Dual Mount:	No
Color Temperature Range:	2420-2700
Expected Life Span:	40000 Hours
Light Source:	LED
Kelvin Temperature:	2560
Number of Bulbs:	1
Max Watt:	0.2
Operating Voltage Range:	9-15 VAC/VDC
Finish:	Textured Architectural Bronze



6 LED with Bracket

Technical Information

Width:	3"
Height:	0.75"
Length:	13"
Lamp Included:	Integrated
Weight:	0.95LBS
Voltage:	12 VAC/VDC
Safety Rated:	Wet
Dual Mount:	No
Color Temperature Range:	2420-2700
Expected Life Span:	40000 Hours
Light Source:	LED
Kelvin Temperature:	2560
Number of Bulbs:	6
Max Watt:	1.53
Operating Voltage Range:	9-15 VAC/VDC
Finish:	Textured Architectural Bronze





PAR36 - 6W, 10W & 18W

- 6 Watt - 270 Lumen
- 10 Watt - 450 Lumen
- 18 Watt - 750 Lumen
- IP67 Rated
- 40,000 Hr. rated life at L70
- Rated for outdoor use
- Input voltage 10-15V
- Operating temperature -4°F to 122°F for 6W & 10W lamps
- Available in Warm White and White
- 5 year warranty



MR16 - 3W, 4W , 5W & 6W

- 3 Watt - 158 Lumen
- 4 Watt - 214 Lumen
- 5 Watt - 265 Lumen
- 6 Watt - 300 Lumen
- 40,000 Hr. rated life at L70
- Rated for outdoor use in enclosed fixture
- Input voltage 10-18V
- Operating temperature -4°F to 122°F
- Available in Warm White, White and Cool White
- 5 year warranty



T3 - 1W & 2W

- 1 Watt - 100 Lumen
- 2 Watt - 200 Lumen
- 3000K CCT
- 20,000 Hr. rated life
- Input voltage 10-18V
- Available in White
- 2 year warranty




T3WR Water Resistant

- **Water resistant T3 available for use in open or enclosed fixtures**
- **2 Watt – 140 Lumens**
- **2700K and 3000K CCT**
- **40,000 hour rated life**
- **Input voltage 10-18V**
- **IP65 Rated**
- **5 Year warranty**

FLEX™ Series
The **GOLD** standard in LED lighting.

LED Energy & Cost Comparison

COST OF ELECTRICITY

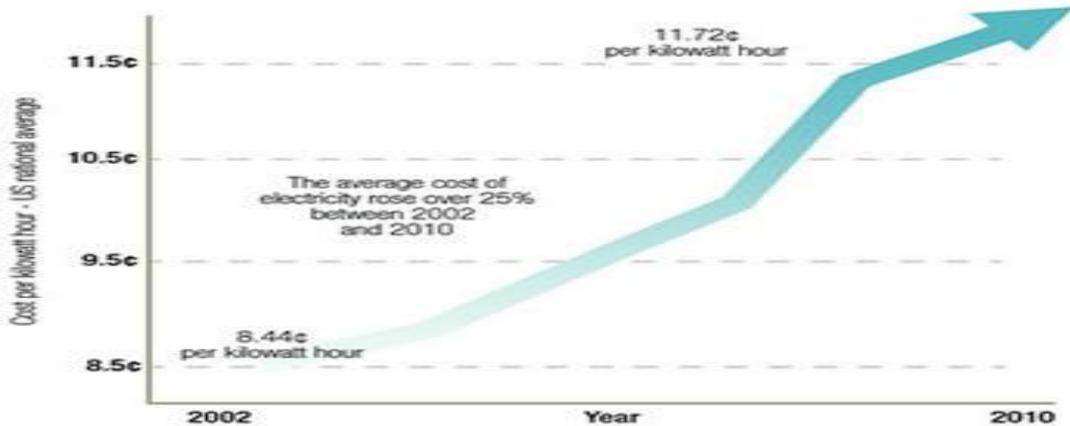

FLEX™ Halogen Wattage Equivalent

FLEX™ LAMP	WATTAGE	HALOGEN EQUIVALENT
FLEX-1W-T3-12V	1	10
FLEX-2W-T3-12V	2	20
FLEX-3W-MR16-12V	3	15
FLEX-4W-MR16-12V	4	20
FLEX-5W-MR16-12V	5	25
FLEX-6W-MR16-12V	6	35
FLEX-6W-PAR36-12V	6	20
FLEX-10W-PAR36-12V	10	35
FLEX-18W-PAR36-12V	18	50